

**NEROLAC
PAINT+**

INNOVATIVE SOLUTIONS FOR INTERIOR







Interior ---

Nerolac Impressions Kashmir.....	Pg 02 – 03
Nerolac Impressions Ultra Fresh	Pg 04 – 05
Nerolac Impressions Ultra HD	Pg 06 – 07
Nerolac Impressions HD	Pg 08 – 09
Nerolac Impressions Ideaz	Pg 10 – 11
Nerolac Impressions Metallics.....	Pg 12 – 13
Nerolac Beauty Gold Washable.....	Pg 14 – 15
Nerolac Beauty Gold Classic.....	Pg 16 – 17
Nerolac Beauty Smooth.....	Pg 18 – 19
Nerolac Little master.....	Pg 20 – 21



NEROLAC IMPRESSIONS KASHMIR



PRODUCT DESCRIPTION

Nerolac Impressions Kashmir Luxury Emulsion is a superior quality 100% acrylic emulsion based interior wall paint with germ killing formula. It is based on Silver Ion Technology that kills 99% of bacteria on the painted surface and gives safe & healthy environment at home. It gives your walls a radiant sheen and a rich smooth finish along with ultra-low odour. The opacity, washability, stain resistance and levelling are outstanding, thereby creating a high class finish that keeps the wall awe-inspiring for years.

PERFORMANCE FEATURES & BENEFITS

	Luxury Finish		Excellent Washability
	Radiant Sheen		Excellent Flow and Leveling
	High Definition colors		Kills 99% Germs
	Superior Stain Protect		5 Years Warranty
	Low VOC and Low Odour		Anti-Bacterial
	Superior Dust resistance		Anti-Viral

SURFACE PREPARATION

1. Rub the surface using a suitable abrasive paper and wipe it off to ensure that the surface is clean, dry and free from dirt, grease, wax or any other defective or poorly adhering material.
2. Treat fungus affected areas with Nerolac Fungicidal Solution and allow it to react for 6-8 H
3. Apply 1 coat of Nerolac Perma Damp Protect Interior at 50% dilution. (OR) Self-Priming at 100% dilution.
4. Sand the surface with emery paper no. 320 and clean the surface with cloth.
5. Apply 1 coat of Nerolac Perma Damp Protect Interior at 50% dilution. (OR) Self-Priming at 100% dilution.
6. Sand the surface with Emery paper no.320 and clean the surface with cloth before painting.
7. Finally, apply 2-3 coats of Nerolac Impressions Kashmir at 40-50% dilution. Dark shade may require additional coat for hiding.

RECOMMENDED USAGE

Nerolac Impressions Kashmir Luxury Emulsion is designed for application on new as well as previously painted interior surfaces such as plaster, brickwork, cement rendering, concrete, hard boards, etc.

APPLICATION (FOR NEW MASONRY SURFACES)

1. Primer** (1 coat), Dry for 4-6 h
2. Putty##, Dry for 6-8 h
3. Primer** (1 coat), Dry for 4-6 h
4. Finish Nerolac Impressions Kashmir (2-3 coats). Dry min for 3-4 h in between coats.

Sand the surface with Emery paper and clean before application of subsequent coat.

** Nerolac Perma Damp Protect Interior at 50% dilution. (OR) Self-Priming at 100% dilution.

Nerolac Wall putty or Nerolac Cement putty.

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces, skip steps 1 & 2 and start with step 3.

PRECAUTIONS

1. Refer MSDS for "Nerolac Impressions Kashmir" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from the source of ignition and fire.
3. Keep away from children.
4. In case of eye/skin contact, wash with plenty of water.
5. Inhalation/Injection will cause danger. In either case, move to fresh air & consult medical practitioners in both the cases.
6. Do not apply when ambient temperature might drop to level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipment's like rubber or polythene gloves, safety goggles/glasses & face mask.

TECHNICAL DATA



*** Actual coverage may vary depending on method & condition of application, surface roughness & surface.

POST APPLICATION INSTRUCTIONS

For removing stains, sponge clean with mild soap solution and wipe clean. Please allow 2 week of drying time to freshly painted wall for it to be ready for stain removal/cleaning.



SAFETY FEATURES

Non-Flammable



SHADE RANGE

As per Nerolac Colour Scapes Fandek & Shade Card



PACK SIZE

1 L., 4 L., 10 L. & 20 L.



SHELF LIFE

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat.


DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The Company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC IMPRESSION ULTRA FRESH



PRODUCT DESCRIPTION

Nerolac Impression Ultra Fresh luxury emulsion paints your walls with an everlasting rich creme finish. Its unique paint formula captures indoor air pollutants & free formaldehyde making your air cleaner than before. With Ultra Low Odour & Ultra low VOC, this paint gives your home all-around freshness.

PERFORMANCE FEATURES & BENEFITS

 <p>Absorbs Indoor Air Pollutants</p>	 <p>Matt Finish</p>
 <p>Formaldehyde Abatement Properties</p>	 <p>Rich Smooth Finish</p>
 <p>Ultra Low VOC & Low Odour</p>	

SURFACE PREPARATION

1. Remove all loose or Poorly adhering material, dirt, grease, wax etc. from the surface and apply a coat of Nerolac Premium or Popular Primer (Water Thinnable / Solvent Thinnable) and allow it to dry.
2. Apply Nerolac Acrylic Wall Putty / Cement Putty to level the dents, dry, followed by sanding with emery paper 180 and wipe clean.
3. Apply another coat of Nerolac Premium or Popular Primer (Water Thinnable / Solvent Thinnable) and allow it to dry. After drying sand the surface with emery paper No. 320 and wipe clean.
4. Dry minimum 8 h for solvent thinnable primer & minimum 4-6 h for water thinnable Primer.

APPLICATION

1. Thin 1 L paint with maximum 400-500 ml of water.

2. Apply 2-3 coats of Nerolac Impressions Ultra Fresh with an interval of 4-6 h by brush or roller.

3. Dark shade may require additional coat for hiding.

PRECAUTIONS

1. Refer MSDS for Nerolac Impressions Ultra Fresh for safety measures & precautions.
2. Store in well ambient conditions, Ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection will cause danger. In case move to fresh air & consult a medical practitioners in both the cases.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Do not use universal stainers. Stir well before paint application.
10. The container must be tightly closed when not in use.

TECHNICAL DATA



*** Actual coverage capacity may vary depending upon the method & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity and shade.

*** Paint with estimated VOC in the range of 5g/L without addition of colorant (Ref: KNP lab results). VOC content may vary from batch to batch.

POST APPLICATION INSTRUCTIONS

For removing stains, Sponge clean with mild soap solution and wipe clean. Please allow 2 weeks of drying time to freshly painted wall for it to be ready for stain removal/cleaning.



SAFETY FEATURES

Non-Flammable



PACK SIZE

1 L, 4 L, 10 L & 20 L.



SHADE RANGE

As per Nerolac Colour Scapes Fandeck & Shade Card



SHELF LIFE

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat



HEALTH & SAFETY PRECAUTIONS

Avoid inhalation, eye and skin contact. In case of contact, wash with water and Seek medical attention. Do not pour the leftovers in the drain. Dispose off after natural drying



STORAGE

Store in a cool & dry place. Keep away from direct sunlight. Thinned paint to be consumed within 24 h after thinning

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC IMPRESSIONS ULTRA HD PREMIUM LUXURY EMULSION

NEROLAC PAINT+



RADIANT SHEEN



ULTRA HIGH
DEFINITION
COLOURS



SUPERIOR STAIN
RESISTANCE



ULTRA LOW
ODOUR / VOC

PRODUCT DESCRIPTION

Ultra- High Definition Luxury Emulsion gives your walls a radiant sheen with Ultra HD colours and rich smooth finish with excellent washability, superior stain-resistance and ultra-low odour.

PERFORMANCE FEATURES & BENEFITS

	Radiant Sheen		Ultra High Definition Colours
	Rich Smooth Finish		Superior Stain Resistance
	Ultra Low Odour/VOC		Anti-Bacterial
	Excellent Washability		Excellent Flow & Brushability
	Fungal Resistance		

SURFACE PREPARATION

1. Remove all loose or Poorly adhering material, dirt, grease, wax etc. from the surface and apply a coat of suitable Nerolac Premium or Popular Primer (Water thinnable / Solvent thinnable).
2. Apply Nerolac Acrylic Wall Putty / Cement Putty to level the dents, dry, followed by sanding with emery paper 180 and wipe clean.
3. Apply another coat of Nerolac Premium or Popular Primer (Water thinnable / Solvent thinnable). After drying, sand the surface with emery paper No. 320 and wipe clean.
4. Dry minimum 8 h for solvent thinnable primer & minimum 4-6 h for water thinnable Primer.

RECOMMENDED SYSTEM FOR APPLICATION

1. Thin 1L paint with maximum 400-500 ml of water.

2. Apply 2-3 coats of Nerolac Impressions Ultra HD with an interval of 4-6 h by brush or roller.

3. Dark shade may require additional coat for hiding.

PRECAUTIONS

1. Refer MSDS for Nerolac Impressions Ultra HD Luxury Emulsion for safety measures & precautions.
2. Store in well ambient conditions, Ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection will cause danger. In case move to fresh air & consult a medical practitioners in both the cases.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Do not use universal stainers. Stir well before paint application.
10. The container must be tightly closed when not in use.

TECHNICAL DATA



*** Actual coverage capacity may vary depending upon the method & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity and shade.

*** Paint with estimated VOC in the range of 5g/L without addition of colorant (Ref: KNP lab results) .VOC content may vary from batch to batch.

POST APPLICATION INSTRUCTIONS

For removing stains, Sponge clean with mild soap solution and wipe clean. Please allow 2 weeks of drying time to freshly painted wall for it to be ready for stain removal/cleaning.

	<p>SAFETY FEATURES Non-Flammable</p>		<p>PACK SIZE 1 L, 4 L, 10 L & 20 L.</p>
	<p>SHADE RANGE As per Nerolac Colour Scapes Fandeck & Shade Card</p>		<p>SHELF LIFE 2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct unlight and excessive heat.</p>
	<p>HEALTH & SAFETY PRECAUTIONS Avoid inhalation, eye and skin contact. In case of contact, wash with water and Seek medical attention. Do not pour the leftovers in the drain. Dispose off after natural drying</p>		<p>STORAGE Store in a cool & dry place, Keep away from direct sunlight, Thinned paint to be consumed within 24 h after thinning</p>

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC IMPRESSIONS HD PREMIUM LUXURY EMULSION

NEROLAC PAINT+



PRODUCT DESCRIPTION

Nerolac Impressions HD, a water based luxury emulsion gives your walls an exquisite look with clear HD colours & a rich smooth finish. It stays awe inspiring for years with excellent washability & superior stain resistance.

PERFORMANCE FEATURES & BENEFITS



SURFACE PREPARATION

1. Rub the surface using a suitable abrasive paper and wipe it off to ensure that the surface is clean, dry and free from dirt, grease, wax or any other defective or poorly adhering material.
2. Treat fungus affected areas using Nerolac Fungicidal Solution and allow it to react for 6-8 h.
3. Apply a coat of suitable Primer** (water/solvent thinnable) followed by Nerolac Wall Putty## / Nerolac Cement Putty### (wherever required) to level and smoothen the surface.
4. Sand the surface with Emery paper 180 & wipe clean.
5. Apply another coat of suitable primer** on puttied areas.
6. Sand the surface with Emery paper 320 & clean the surface with cloth before painting.
7. Finally, apply two to three coats of Nerolac Impressions HD Luxury Emulsion as per recommended thinning. Dark shades may require additional coat for hiding.

RECOMMENDED USAGE

Nerolac Impressions HD luxury emulsion is designed for application on new as well as previously painted interior surfaces such as plaster, brickwork, cement rendering, concrete, hard boards, etc.

APPLICATION (For New Masonry Surfaces)

1. Primer**(1 coat), Dry# in 4-6 h.
2. Putty##, Dry in 6-8 h.
3. Primer**(1 coat), Dry# in 4-6 h.
4. Finish Nerolac Impressions HD Luxury Emulsion (2-3 coats), Dry min.3-4 h in between coats.

Sand the surface with Emery paper and clean before application of subsequent coat.

**Nerolac Premium or Popular Primer (Water thinnable / Solvent thinnable).

##Nerolac Wall putty or Nerolac Cement putty.

#Minimum 8 h for solvent thinnable primer & minimum 4-6 h for water thinnable Primer.

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

PRECAUTIONS

1. Refer MSDS for "Nerolac Impressions HD Luxury Emulsion" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

TECHNICAL DATA



***Actual coverage may vary depending on method & condition of application, surface roughness & surface.

POST APPLICATION INSTRUCTIONS

For removing stains, sponge clean with a mild soap solution and wipe clean. Please allow 2 weeks of drying time to freshly painted wall for it to be ready for stain removal / cleaning.



SAFETY FEATURES
Non-Flammable



PACK SIZE
1 L, 4 L, 10 L & 20 L.



SHADE RANGE
As per Nerolac Colour Scapes Fandeck & Shade Card



SHELF LIFE
2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat.

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The Company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC IMPRESSIONS IDEAZ ULTRA LUXURY EMULSION



NEROLAC PAINT+

PRODUCT DESCRIPTION

Nerolac Impressions IDEAZ is a Special Effect Designer series range that creates a variety of designs on interior walls in matt finish.

PERFORMANCE FEATURES & BENEFITS

	Creation of Various Designs with Different Application Tools		Excellent Stain Resistance
	Excellent Fungal Resistance		Soft Sheen
	Excellent Workability		Washable

SURFACE PREPARATION

1. Rub the surface using a suitable abrasive paper and wipe it off to ensure that the surface is clean, dry and free from dirt, grease, wax or any other defective or poorly adhering material.
2. Treat fungus affected areas using Nerolac Fungicidal Solution and allow it to react for 6-8 h.
3. Apply a coat of suitable Primer** (water / solvent thinnable) followed by Putty### (wherever required) to level and smoothen the surface.
4. Sand the surface with emery paper 180 & wipe clean.
5. Apply another coat of suitable primer** on puttied areas.
6. Sand the surface with emery paper 320 & clean the surface with cloth before painting.
7. Finally, apply two to three coats of Nerolac Impressions HD as per recommended thinning. Dark shades may require additional coat for hiding.

RECOMMENDED USAGE

Nerolac Impressions IDEAZ can be applied on the interior surfaces such as smooth plaster, brickwork, cement rendering, concrete, hardboard, building boards, etc.

RECOMMENDED SYSTEM FOR APPLICATION - For New Masonry Surfaces

1. Primer** (1 coat), Dry# in 4-6 h.
2. Putty###, Dry in 6-8 h.
3. Primer** (1 coat), Dry# in 4-6 h.
4. Base Coat (2-3 coats) Impressions HD, Dry in 4-6 h in between the coats.
5. Finish Coat (1 Coat) Nerolac Impressions Ideaz (as per design required)

Sand the surface with Emery paper and wipe clean before application of subsequent coat.

**Nerolac Premium Primer (Water Thinnable / Solvent Thinnable) or Nerolac Popular Primer (Water Thinnable / Solvent Thinnable).

###Nerolac Wall Putty or Nerolac Cement Putty.

#Minimum 8 h for Solvent Thinnable Primer & minimum 4-6 h for Water Thinnable Primer.

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

PRECAUTIONS

1. Refer MSDS for "Nerolac Impressions IDEAZ" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. The container must be tightly closed when not in use. Stir well before use.
9. Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.



TECHNICAL DATA



** Actual Covering capacity may vary depending upon the method of application & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity & shade.

POST APPLICATION INSTRUCTIONS

For removing stains, sponge clean with a mild soap solution and wipe clean. Ensure a drying time of 2 weeks before cleaning.

 SAFETY FEATURES Non-Flammable	 PACK SIZE 200 ml, 1 L
 SHADE RANGE As per Shade Card	 SHELF LIFE 2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat
 NO. OF SHADES POSSIBLE More Than 70	

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC IMPRESSIONS METALLIC FINISH WALL EMULSION (DESIGNER SERIES)

NEROLAC PAINT+



PRODUCT DESCRIPTION

Nerolac Impressions Metallic Finish Wall Emulsion is a premium-quality, Special effect designer series range that creates a variety of special effects and textures on interior walls and is based on pure acrylic emulsion.

PERFORMANCE FEATURES & BENEFITS

	Can make Various Designs with Different Application Tools		Excellent Workability
	Very good AntiFungal Resistance		Smooth Metallic Finish with sheen
	Excellent Stain Resistance		Excellent Washability

SURFACE PREPARATION

1. Rub the surface using a suitable abrasive paper & wipe it off to ensure that the surface is clean, dry & free from dirt, grease, wax or any other defective or poorly adhering material.
2. Treat fungus affected areas using Nerolac Fungicidal Solution & allow it to react for 6-8 h.
3. Apply a coat of suitable Primer** (water/solvent thinnable) followed by Putty### to level and smoothen the surface.
4. Sand the surface with emery paper 180 & wipe clean. Apply another coat of suitable Primer**, Sand the surface with emery paper 320 & wipe clean.
5. Apply Base (2-3 coats) Nerolac Impressions HD. Dry in 4-6 h in between the coats.

RECOMMENDED USAGE

Nerolac Impressions Metallic Finish Wall Emulsion can be applied on the interior surfaces, on new & previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboard, building boards, etc.

RECOMMENDED SYSTEM FOR APPLICATION

For New Masonry Surfaces

1. Primer** (1 coat), Dry# in 4-6 h.
2. Putty###, Dry in 6-8 h.
3. Primer** (1 coat), Dry# in 4-6 h.
4. Base (2-3 coats) Nerolac Impressions HD, Dry in 4-6 h in between the coats.
5. Finish Coat (1 Coat) Nerolac Impressions Metallic Finish Wall Emulsion

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

Sand the surface with Emery paper and wipe clean before application of subsequent coat.

**Nerolac Premium Primer (Water Thinnable / Solvent Thinnable) or Nerolac Popular Primer (Water Thinnable / Solvent Thinnable).

###Nerolac Wall Putty or Nerolac Cement Putty.

#Minimum 8 h for Solvent Thinnable Primer & minimum 4-6 h for Water Thinnable Primer.

PRECAUTIONS

1. Refer MSDS for "Nerolac Impressions Metallic Finish Wall Emulsion" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. The container must be tightly closed when not in use. Stir well before use.
10. Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

TECHNICAL DATA



**Actual coverage may vary depending on method, Condition of Application, Type of Tools, Surface Porosity & Shade. Use of felt Roller may reduce coverage upto 50%.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Impressions Metallic Finish are wash-able by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.



SAFETY FEATURES

Non-Flammable



PACK SIZE

500 ml & 1 L, 4L



SHADE RANGE

As per Nerolac Impressions Metallic
Finish Wall Emulsion Shade Card



SHELF LIFE

2 years from the date of manufacturing, when
stored in the original tightly closed containers,
away from direct sunlight & excessive heat


DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC BEAUTY GOLD WASHABLE



PRODUCT DESCRIPTION

Nerolac Beauty Gold Washable has a rich sheen finish with excellent stain-cleanability at an affordable price. It maintains its fresh look for years. It is a well-balanced product with good Anti-Bacterial & Anti-Fungal properties and good elongation that takes care of any hairline cracks.

PERFORMANCE FEATURES & BENEFITS



SURFACE PREPARATION

1. Ensure that the plastered surface is clean, dry & free from any loose or poorly-adhering material, dirt, grease etc.
2. Apply a coat of Nerolac Premium or Popular Primer (Water Thinnable / Solvent Thinnable) and allow it to dry.
3. Apply the Nerolac Wall/Cement Putty (wherever required) to level-out the undulations. Sand the surface with emery paper no. 180 and wipe it clean.
4. Apply another coat of Nerolac Premium or Popular Primer (Water Thinnable / Solvent Thinnable) and allow it to dry. Sand the surface with emery paper no. 320 and wipe it clean with a cloth before painting.
5. Dry minimum 8 h for solvent thinnable primer & minimum 4-6 h for water thinnable Primer.

RECOMMENDED USAGE

Nerolac Beauty Gold Washable is designed for application on new, as well as the previously painted interior surfaces such as plaster, brickwork, cement renderings, concrete, hardboards etc.

APPLICATION

1. Dilute 1 L of paint with a maximum of 500-600 ml of clean water. Apply 2 to 3 coats with an interval of 3-4 h by brush or roller, depending on the ambient conditions.
2. Dark shades may require additional coats for hiding.

PRECAUTIONS

1. Refer to the MSDS for "Nerolac Beauty Gold Washable" for safety measures & precautions.
2. Store in well-ambient conditions, ventilated locations & away from any source of ignition and fire.
3. Keep it away from children.
4. In case of eye/skin contact, wash with plenty of water.
5. Inhalation/Injection will cause danger. In either case, get fresh air & consult medical practitioners.
6. Do not apply when the ambient temperature might drop to levels below 10°C within 4 h of application.
7. The new plaster should be allowed to cure for a minimum of 12 weeks.
8. Avoid extra-thinning.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles/glasses & face masks.

TECHNICAL DATA



*** Actual coverage may vary from the quoted coverage due to factors such as the application conditions, surface preparation and porosity.

POST APPLICATION INSTRUCTIONS

For the best performance, ensure dry dust-cleaning at regular intervals. Allow a drying-time of 2 weeks for proper film-formation before doing any sponge cleaning with a mild soap-solution or mineral turpentine.

STAIN-CLEANING INSTRUCTIONS

- The paint film needs at least a week after application, to be set & ready for the stain-removal.
- Wipe gently. Do not use liquid bleach.
- For light stains like mud, pencil, tea, coffee etc., use a sponge soaked with soap-solution.
- For tougher stains like pickle, oil, grease, wax & oil crayons etc., use a sponge soaked with mineral turpentine.
- The early removal of stains gives better results.



SAFETY FEATURES

Non-Flammable



PACK SIZE

1 L., 4 L., 10 L. & 20 L.



SHADE RANGE

As per Nerolac Colour Scapes Fandeck & Shade Card



SHELF LIFE

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat.

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The Company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC BEAUTY GOLD CLASSIC

NEROLAC PAINT+



PRODUCT DESCRIPTION

Nerolac Beauty Gold Classic is a specially formulated emulsion paint based on copolymer resin, high opacity, micronized pigments which makes it durable and gives a beautiful finish.

PERFORMANCE FEATURES & BENEFITS

	Economical and Durable		Smooth Matt Finish
	Max Coverage		Quick Drying
	Anti-Bacterial		Fungal Resistance
	Good Washability		Crack Protection
	Excellent Application Properties		

SURFACE PREPARATION

1. Ensure the surface is clean, dry, free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down, using suitable abrasive paper and thereafter wipe off.
2. Treat fungus affected areas using Nerolac Fungicidal Solution. Allow it to react for 6-8 h.
3. Apply a coat of suitable Primer** followed by Nerolac Wall Putty*** to level the dents and make the surface uniform. Sand the surface with emery paper 180 and wipe clean.
4. Apply again a coat of suitable primer**, Sand the surface with emery paper 320 and wipe clean.
5. Then apply two to three coats of Nerolac Beauty Gold Classic.

RECOMMENDED USAGE

It is recommended for interior application on a wide variety of new or previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboard, building boards, etc. It can be applied on ceiling and wall surfaces where a matt finish, free-from-irritating-glare due to light reflection is desired.

RECOMMENDED SYSTEM FOR APPLICATION - For New Masonry Surfaces

1. Primer**(1 coat), Dry# in 4-6 h.
2. Putty###, Dry in 6-8 h.
3. Primer**(1 coat), Dry# in 4-6 h.
4. Finish Nerolac Beauty Gold Classic (2-3 coats), Dry min. 4-6 h in between coats.

Sand the surface with Emery paper and wipe clean before application of subsequent coat.

**Nerolac Premium or Popular Primer (Water thinnable / Solvent thinnable).

***Nerolac Wall putty or Nerolac Cement putty.

#Minimum 8 h for solvent Thinnable primer & minimum 4-6 h for water Thinnable Primer.

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

PRECAUTIONS

1. Refer MSDS for "Nerolac Beauty Gold Classic" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

TECHNICAL DATA



**Actual coverage may vary depending on method, Condition of Application, Type of Tools, Surface Porosity & Shade. Use of felt Roller may reduce coverage up to 50%.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Nerolac Beauty Gold Classic are washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.

	SAFETY FEATURES Non-Flammable		PACK SIZE 1 L, 4 L, 10 L & 20 L.
	SHADE RANGE As per Nerolac Colour Scapes Fandeck & Shade Card		SHELF LIFE 2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC BEAUTY SMOOTH INTERIOR EMULSION

NEROLAC PAINT+



PRODUCT DESCRIPTION

Nerolac Beauty Smooth Interior Emulsion is a specially developed, economical interior emulsion for a distinctly rich and smooth finish. Its optimum performance with respect to decoration and protection, is through an ideal combination of pigments and extenders, dispersed in a copolymer emulsion.

PERFORMANCE FEATURES & BENEFITS

	Smooth and pleasing matt finish		Long Lasting
	Quick Drying		Ease of Application
	Good Washability		Economical product with optimum performance

SURFACE PREPARATION

1. Ensure the surface is clean, dry, free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down, using suitable abrasive paper and thereafter wipe off.
2. Treat fungus-affected area using Nerolac Fungicidal Solution. Allow it to react for 6-8 h.
3. Apply a coat of suitable Primer** followed by Nerolac Wall Putty## to level the dents and make the surface uniform. Sand the surface with emery paper 180 and wipe clean.
4. Again apply a coat of suitable primer**, Sand the surface with emery paper 320 and wipe clean.
5. Then apply two to three coats of Nerolac Beauty Smooth Interior Emulsion.

RECOMMENDED USAGE

Nerolac Beauty Smooth Finish Interior Emulsion is recommended for interior wall surfaces such as ceilings, plasters, bricks, asbestos, etc.

RECOMMENDED SYSTEM FOR APPLICATION - For New Masonry Surfaces

1. Primer** (1 coat), Dry# in 4-6 h.
2. Putty##, Dry in 6-8 h.
3. Primer** (1 coat), Dry# in 4-6 h.
4. Finish Nerolac Beauty Smooth Interior Emulsion (2-3 coats), Dry min. 4-6 h in between coats.

Sand the surface with Emery paper and clean before application of subsequent coat.

**Nerolac Premium or Popular Primer (Water thinnable / Solvent thinnable)

##Nerolac Wall putty or Nerolac Cement putty.

#Minimum 8 h for solvent thinnable primer & minimum 4-6 h for water Thinnable Primer.

For Repainting on Smooth Lime/ Distemper/ Emulsion/ Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

PRECAUTIONS

1. Refer MSDS for "Nerolac Beauty Smooth Interior Emulsion" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.


TECHNICAL DATA



**Actual coverage may vary depending on method & condition of application, Type of Tools, surface porosity & Shade, use of Felt Roller may reduce coverage up to 50%.

POST APPLICATION INSTRUCTIONS

Surface painted with Nerolac Beauty Smooth Finish Interior Emulsion are washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.

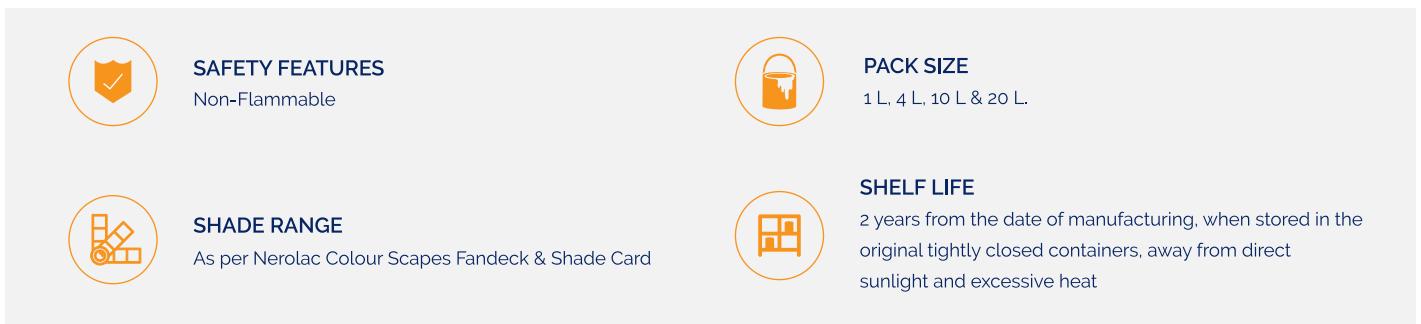

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products, therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement, prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC BEAUTY LITTLE MASTER



PRODUCT DESCRIPTION

Nerolac Beauty Little Master is a specially developed economical product with a smooth finish with better whiteness, opacity and coverage compared to normal distemper. It is formulated by using ideal combination of pigments and extenders dispersed in a copolymer emulsion for smooth and pleasant matt finish.

PERFORMANCE FEATURES & BENEFITS

	Plastic Emulsion		Good Whiteness
	Smooth & Pleasing Matt Finish		Ease of Application
	Good Coverage		Economical Product with Optimum performance

SURFACE PREPARATION

1. Ensure the surface is clean, dry, free from all defective or poorly adhering materials by rubbing down, using suitable abrasive paper & thereafter wiped off.
2. Treat fungus affected areas using Nerolac Fungicidal Solution. Allow it to react for 6-8 h.
3. Apply a coat of suitable Primer** followed by Nerolac Wall Putty## to level the dents and make the surface uniform. Sand the surface with emery paper 180 and wipe clean.
4. Again apply a coat of suitable primer**, Sand the surface with emery paper 320 and wipe clean.
5. Then apply two to three coats of Nerolac Beauty Little Master.

RECOMMENDED USAGE

Nerolac Beauty Little Master is recommended for interior wall surface such as ceilings, plasters, bricks, asbestos, concrete, etc.

RECOMMENDED SYSTEM FOR APPLICATION - For New Masonry Surfaces

1. Primer** (1 coat), Dry# in 4-6 h.
2. Putty##, Dry in 6-8 h.
3. Primer** (1 coat), Dry# in 4-6 h.
4. Finish Nerolac Beauty Little master (2-3 coats), Dry min. 4-6 h in between coats.

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

Sand the surface with Emery paper and clean before application of subsequent coat.

**Nerolac Premium or Popular Primer (Water thinnable / Solvent thinnable).

##Nerolac Wall putty or Nerolac Cement putty.

#Minimum 8 h for solvent thinnable primer & minimum 4-6 h for water thinnable Primer.

PRECAUTIONS

1. Refer MSDS for "Nerolac Beauty Little Master" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well before use.
11. Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

TECHNICAL DATA



**Actual coverage may vary depending on method, Condition of Application, Type of Tools, Surface Porosity & Shade. Use of felt Roller may reduce coverage upto 50%.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Nerolac Beauty Little Master Interior Emulsion are washable by sponging with mild soap and water. After a minimum of 2 weeks drying to remove ordinary stains and every day dirt.



SAFETY FEATURES

Non-Flammable



PACK SIZE

1 L, 4 L, 10 L & 20 L and
1 kg, 5 kg, 10 kg & 20 kg



SHELF LIFE

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat



SHADE RANGE

As per Nerolac Colour Scapes
Fandeck & Shade Card

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.



NEROLAC PAINT+

A SUBSIDIARY OF KANSAI PAINT CO. LTD. JAPAN

Nerolac House, Ganpatrao Kadam Marg, Lower Parel, Mumbai - 400013.
Call toll free no: 18002092092 | Visit us at www.nerolac.com

CONNECT WITH US ON:

www.youtube.com/user/NerolacPaints

<http://www.facebook.com/user/NerolacPaints.India>

http://twitter.com/#!/Nerolac_Paints